



ASP160-04-005A

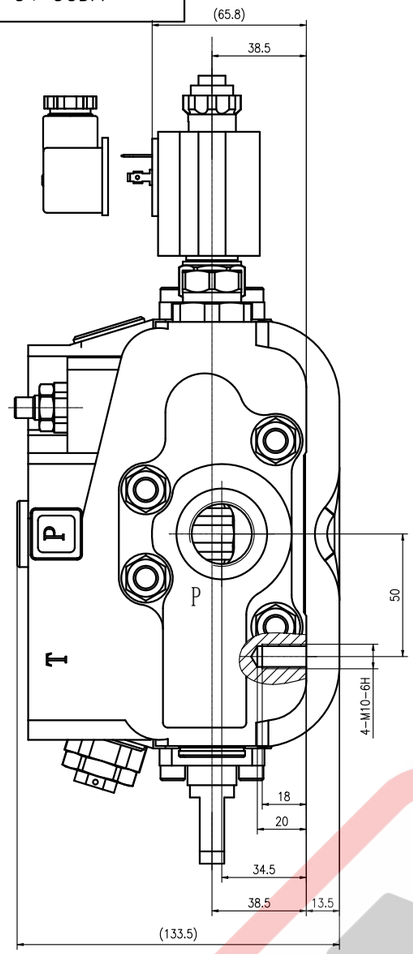

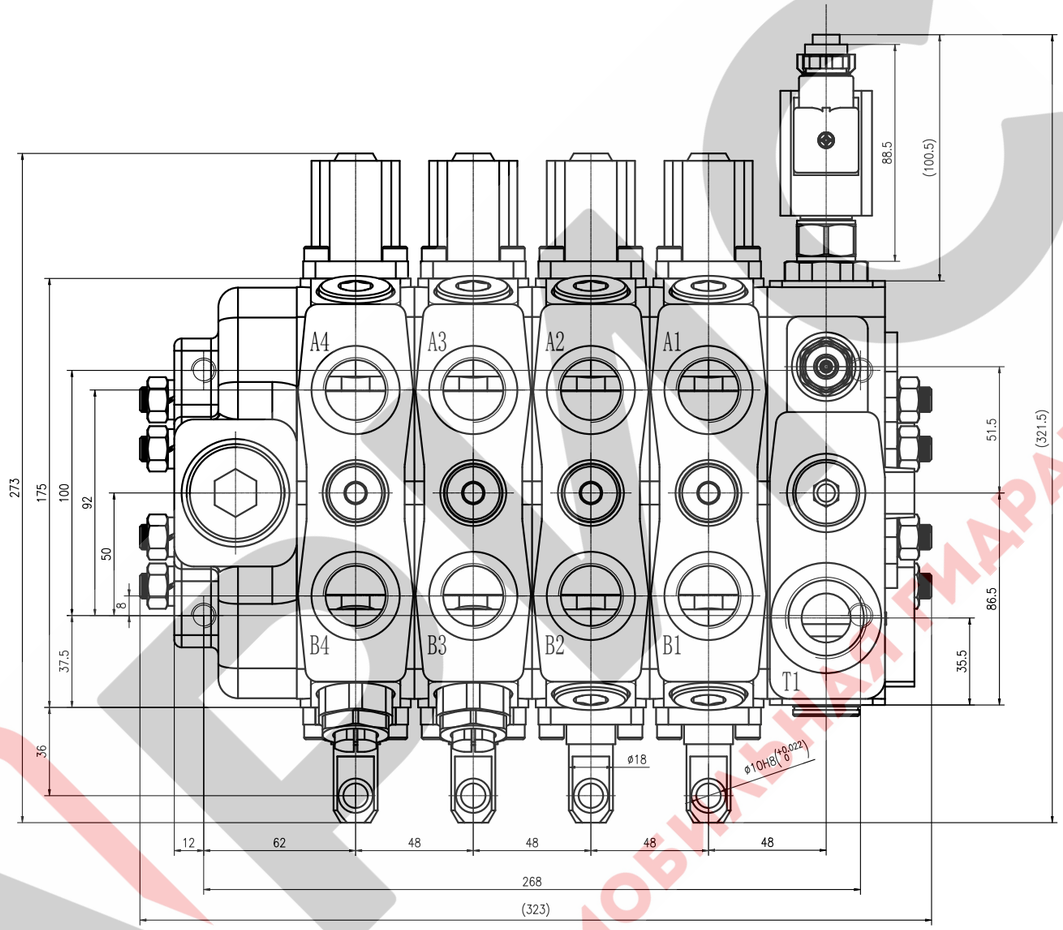

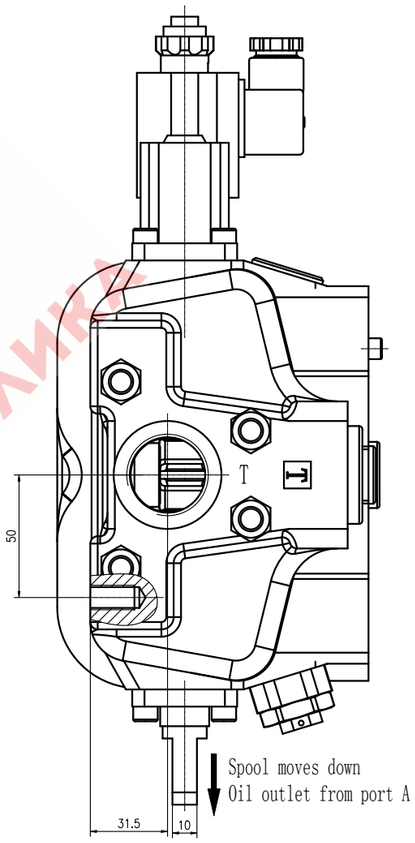

HYDRAULIC CIRCUIT

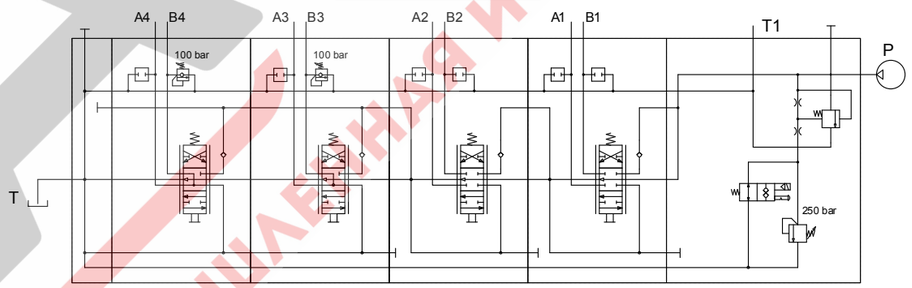

technical parameter
1. Rated flow rate: 160L/min;
2. Rated pressure: 250bar; Maximum pressure: 315 bar;
3. Maximum allowable back pressure: 25bar;
4. Sealing material: NBR
5. Working temperature: -40 ° C~+80 ° C;
6. Environmental temperature: -45 ° C~+85 ° C;
7. Oil port size: A1~A4/B1~B4/P: G3/4 (ISO1179-1);
T/T1:G1 (ISO1179-1)；
MP:G1/2 (ISO1179-1)；
8. Purity of the hydraulic fluid is allowed when operation: 19/16 ISO -4406;
9. Neutral position internal leakage (A1, B1, A2, B2): 25 ml/min at 100 bar, (40°C and 46 mm ²/ s)
(A3, B3, A4, B4): Neutral position pass T, no leakage requirement;
10. Valve spool stroke: ± 7mm;

Electrical parameters
1. Rated voltage: 24VDC ± 15%;
2. Plug connection form: equipped with A-2P connection plug (DIN43650), Protection level IP65;
2. Nominal power consumed: 26W;
3. Duration of the solenoids turning on: 100%;

图纸版本
借(通)用件登记
描　图
描　校
旧底图总号
底图总号
签　字
日　期

标记	处数	分区	更改文件号	签 字	日期
设 计			标准化		
校 对			审 定		
审 核			批 准		
工 艺			时 间		

Габаритный чертеж

图样标记	重量	比例
		1:2.3

ООО "АРИС"

Гидрораспределитель 4х секционный

ASP160-04-005A

ПРОМЫШЛЕННАЯ ГИДРАВЛИКА И МОБИЛЬНАЯ